

箱体规格/Cabinet Specifications


 进深 **500mm**

单位/mm

交货期的区分	型号	门形式	铁制基板型	外形尺寸			门尺寸		门面设备安装有效尺寸		铁制基板尺寸		有效空间		
				A (宽度)	B (高度)	C (进深)	D	E	D 1	E 1	F	G	C 1	A 1	B 2
△	FZ50-618-T	单门	1 块板	600	1,800	500	592	1,787	420	1,620	485	1,655	450	354	750
△	FZ50-620-T	"	"	"	2,000	"	"	1,987	"	1,820	"	1,855	"	"	850
△	FZ50-818-T	"	"	800	1,800	"	792	1,787	620	1,620	685	1,655	"	554	750
△	FZ50-820-T	"	"	"	2,000	"	"	1,987	"	1,820	"	1,855	"	"	850
△	FZ50-1018-T	双门	"	1,000	1,800	"	992	1,787	320	1,620	885	1,655	"	754	750
△	FZ50-1020-T	"	"	"	2,000	"	"	1,987	"	1,820	"	1,855	"	"	850
△	FZ50-1218-T	"	上下 2 块板	1,200	1,800	"	1,192	1,787	420	1,620	1,085	1,655	"	954	750
△	FZ50-1220-T	"	"	"	2,000	"	"	1,987	"	1,820	"	1,855	"	"	850

 进深 **600mm**

△	FZ60-618-T	单门	1 块板	600	1,800	600	592	1,787	420	1,620	485	1,655	550	354	750
△	FZ60-620-T	"	"	"	2,000	"	"	1,987	"	1,820	"	1,855	"	"	850
△	FZ60-622-T	"	"	"	2,200	"	"	2,187	"	2,020	"	2,055	"	"	950
△	FZ60-818-T	"	"	800	1,800	"	792	1,787	620	1,620	685	1,655	"	554	750
△	FZ60-820-T	"	"	"	2,000	"	"	1,987	"	1,820	"	1,855	"	"	850
△	FZ60-822-T	"	"	"	2,200	"	"	2,187	"	2,020	"	2,055	"	"	950
△	FZ60-1018-T	双门	"	1,000	1,800	"	992	1,787	320	1,620	885	1,655	"	754	750
△	FZ60-1020-T	"	"	"	2,000	"	"	1,987	"	1,820	"	1,855	"	"	850
△	FZ60-1022-T	"	上下 2 块板	"	2,200	"	"	2,187	"	2,020	"	2,055	"	"	950
△	FZ60-1218-T	"	"	1,200	1,800	"	1,192	1,787	420	1,620	1,085	1,655	"	954	750
△	FZ60-1220-T	"	"	"	2,000	"	"	1,987	"	1,820	"	1,855	"	"	850
△	FZ60-1222-T	"	"	"	2,200	"	"	2,187	"	2,020	"	2,055	"	"	950


 进深 **800mm**

△	FZ80-820-T	单门	1 块板	800	2,000	800	792	1,987	620	1,820	685	1,855	750	554	850
△	FZ80-822-T	"	"	"	2,200	"	"	2,187	"	2,020	"	2,055	"	"	950
△	FZ80-1020-T	双门	"	1,000	2,000	"	992	1,987	320	1,820	885	1,855	"	754	850
△	FZ80-1022-T	"	上下 2 块板	"	2,200	"	"	2,187	"	2,020	"	2,055	"	"	950
△	FZ80-1220-T	"	"	1,200	2,000	"	1,192	1,987	420	1,820	1,085	1,855	"	954	850

规格

浅驼色 孟赛尔 5Y7/1
日涂工 E25-70B

板厚	门板 2.3mm,顶板、侧板、后板、底板,底面开口板1.6mm
安装板	铁制安装板 2.3mm (5Y7/1)
门锁样式	IP拉手
颜色	5Y7/1
防护等级	单门IP55

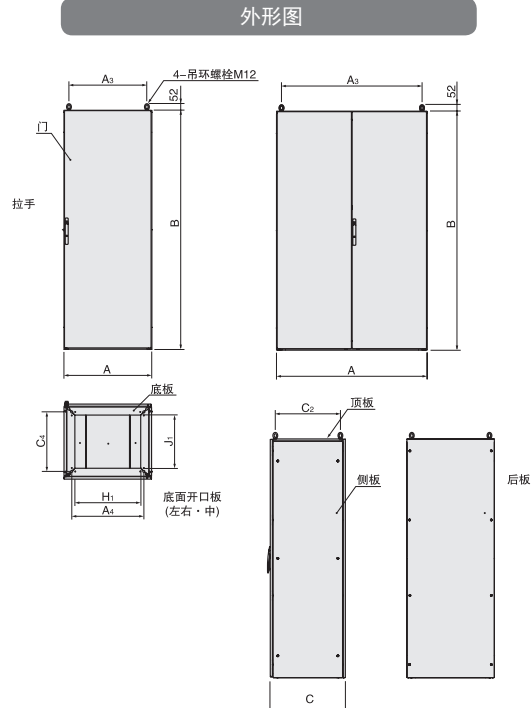

单位/mm

开口尺寸			底板开口尺寸		轨道孔距		吊环螺栓间距		基座连接螺栓间距		产品重量 (kg)	型号	价格 (单位: 元)
H	I	J	H 1	J 1	A 2	B 3	A 3	C 2	A 4	C 4			
505	1,707	405	425	325	450	1,650	520	420	475	375	118	FZ50-618-T	1,654
"	1,907	"	"	"	"	1,850	"	"	"	"	128	FZ50-620-T	1,757
705	1,707	"	625	"	650	1,650	720	"	675	"	140	FZ50-818-T	1,654
"	1,907	"	"	"	"	1,850	"	"	"	"	152	FZ50-820-T	1,757
905	1,707	"	825	"	350	1,650	920	"	875	"	171	FZ50-1018-T	1,654
"	1,907	"	"	"	"	1,850	"	"	"	"	185	FZ50-1020-T	1,757
1,105	1,707	"	1,025	"	450	1,650	1,120	"	1,075	"	193	FZ50-1218-T	1,654
"	1,907	"	"	"	"	1,850	"	"	"	"	209	FZ50-1220-T	1,757

505	1,707	505	425	425	450	1,650	520	520	475	475	127	FZ60-618-T	1,813
"	1,907	"	"	"	"	1,850	"	"	"	"	138	FZ60-620-T	1,887
"	2,107	"	"	"	"	2,050	"	"	"	"	149	FZ60-622-T	2,078
705	1,707	"	625	"	650	1,650	720	"	675	"	150	FZ60-818-T	1,813
"	1,907	"	"	"	"	1,850	"	"	"	"	163	FZ60-820-T	1,887
"	2,107	"	"	"	"	2,050	"	"	"	"	175	FZ60-822-T	2,078
905	1,707	"	825	"	350	1,650	920	"	875	"	180	FZ60-1018-T	1,813
"	1,907	"	"	"	"	1,850	"	"	"	"	195	FZ60-1020-T	1,887
"	2,107	"	"	"	"	2,050	"	"	"	"	210	FZ60-1022-T	2,078
1,105	1,707	"	1,025	"	450	1,650	1,120	"	1,075	"	202	FZ60-1218-T	1,813
"	1,907	"	"	"	"	1,850	"	"	"	"	219	FZ60-1220-T	1,887
"	2,107	"	"	"	"	2,050	"	"	"	"	236	FZ60-1222-T	2,078

705	1,907	705	625	625	650	1,850	720	720	675	675	183	FZ80-820-T	2,270
"	2,107	"	"	"	"	2,050	"	"	"	"	196	FZ80-822-T	2,619
905	1,907	"	825	"	350	1,850	920	"	875	"	214	FZ80-1020-T	2,270
"	2,107	"	"	"	"	2,050	"	"	"	"	230	FZ80-1022-T	2,619
1,105	1,907	"	1,025	"	450	1,850	1,120	"	1,075	"	254	FZ80-1220-T	2,270